

Economic and Environmental Optimization of Vehicle Fleets: A Case Study of the Impacts of Policy, Market, Utilization, and Technological Factors

Miguel A. Figliozi (*)

Associate Professor

Department of Civil and Environmental Engineering
Portland State University

Jesse A. Boudart

Graduate Student

Department of Civil and Environmental Engineering
Portland State University

Wei Feng

PhD Student

Department of Civil and Environmental Engineering
Portland State University

(*) Corresponding Author

Department of Civil and Environmental Engineering
Portland State University

Email: figliozi@pdx.edu

Paper Presented at the

90th Annual Meeting of the Transportation Research Board

January 23–27, 2011

FORTHCOMING 2011 Transportation Research Record

ABSTRACT

This paper focuses on the economic and environmental optimization of vehicle replacement decisions from a fleet manager's perspective. An integer programming vehicle replacement model (VRM) is utilized to evaluate current environmental and policy issues such as greenhouse gas (GHG) taxes and fiscal incentives for electric vehicle purchases. In addition, this research analyzes the impacts of utilization (mileage per year per vehicle) and gasoline prices on vehicle purchasing decisions. Energy and emissions reductions for a variety of scenarios using real-world data in the United States are presented as well as breakeven points where electric vehicles are competitive. Findings include: (a) fuel efficient vehicles such as hybrid and electric vehicles are purchased only in scenarios with high gasoline prices and/or utilization, (b) current European CO₂ cap and trade emissions price (around \$18.7/ton) do not significantly alter fleet management decisions, and (c) electric vehicle incentives (i.e., tax credits) do increase the rate of purchases of hybrid or electric vehicles in scenarios with high gasoline prices and vehicle utilization. This research indicates that the proposed model can be effectively used to inform environmental and fiscal policies regarding vehicle regulations, tax incentives, and GHG emissions.

Keywords: Vehicle Replacement Models, Greenhouse Gas (GHG) Emissions, Hybrid Vehicles, Electric Vehicles, Vehicle Characteristics, Emissions Price, Cost Comparison.

1. Introduction

The recent volatility of fossil fuel prices and the growing concern regarding the environmental costs of fossil fuel production have drawn attention to the need to reduce energy consumption and diversify into cleaner energy sources. Simultaneously, vehicle technologies are rapidly evolving and the automobile market is changing accordingly. In particular, electric vehicle technology is considered by many environmental advocates as a promising solution to reduce fossil fuel consumption and GHG emission levels (Vyas et al., 2009). In this research, the following convention is used to denote different types of vehicles and engine technologies. Internal combustion engine (ICE) vehicles, also called *conventional vehicles*, use gasoline or a fossil fuel as the only source of energy. *Hybrid electric vehicles* (HEV) have an internal combustion engine but also a battery that can be used to power the vehicle wheels. *Plug-in-Hybrid Electric Vehicles* (PHEV) are similar to HEVs but usually with a higher capacity battery. Additionally, PHEVs can be *plugged in* to the electrical grid, hence, the PHEV battery is mostly recharged using the grid whereas the HEV battery is recharged when the vehicle is braking or decelerating. Finally, *electric vehicles* (EV) only have an electrical engine and no combustion engine.

Although still a small share of the automobile marketplace, hybrid vehicle models and sales have been growing steadily. It is now possible to buy several kinds of HEVs such as the Toyota Prius, Honda Civic, or Ford Escape. Even luxury brands such as Lexus and Porsche are working on sporty hybrid vehicles¹. At the time this writing (October 2010), Mitsubishi has already launched the i-MiEV in Japan (April 2010) and several car makers are about to release into the market new EV or PHEV models; for example, the Nissan EV Leaf (December 2010) and the Toyota PHEV Prius (2012)². An intermediate alternative between EVs and conventional vehicles is the Chevrolet Volt that can be powered by an electric motor for 40 miles and a battery that can be recharged by an internal combustion engine or at a charging station.

Economic conditions are also evolving rapidly. After the growth and expansion observed in the middle of the decade, the current economic crisis that started in late 2007 is limiting the consumer's disposable income and access to credit. At the fleet level, private companies and state agencies have been forced to adopt comprehensive planning approaches that seek to reduce operating costs, maintain customers' service levels, and whenever possible, continue sustainable practices or cap GHG emissions.

Decision makers are faced with complex tradeoffs involving economic, environmental, or policy impacts of fleet management decisions or regulations. This research aims to provide a better understanding of the monetary, emissions, and energy consumption tradeoffs associated with distinct

¹ <http://www.hybridcars.com/carmakers.html>, accessed October 10, 2010.

² <http://www.economist.com>, "A sparky new motor", The Economist, October 9th, 2010, online and printed edition

vehicle technologies (conventional fossil fuel based vehicles, hybrid, and electric vehicles) utilizing current real-world market and efficiency data. The specific contributions of this research include: (a) incorporation of GHG costs into fleet vehicle replacement-type models, (b) the analysis of the competitiveness of current engine technologies in the USA, and (c) evaluation of the impacts of policies (tax credits, GHG taxes), usage (miles per year), and market conditions (fuel prices) on the competitiveness of electric vehicles.

This paper is organized as follows. Section two presents a literature review. Section three introduces the notation and formulation of the fleet management model employed in this research. Section four describes the base case scenario and the alternative fifteen scenarios utilized to study the tradeoffs among technologies, GHG costs, fiscal policies, and fuel prices. Section five describes data sources and model inputs. Section six highlights key results and section seven ends with conclusions.

2. Literature and Data Review

Since GHG emissions are largely dependent on the level of consumption of the available forms of gasoline or diesel fuels, private companies have natural economic incentives to use vehicles that are more fuel efficient or powered by less expensive and cleaner energy sources. Incentives to use greener technologies may be compounded by the fact that government incentives exist, e.g. a type of “cash for clunkers” program or tax breaks for new electric vehicles. However, more energy efficient PHEV or EVs have higher upfront purchase prices than conventional gasoline engines in the same vehicle class. This is clearly the case for EVs; a Nissan Leaf has a purchase price of \$33,720 whereas a similar size conventional Ford Fiesta has a purchase price of approximately \$13,200³. In addition, as vehicles age, their value decreases (depreciation) and operating and maintenance (O&M) costs tend to increase. Depreciation and maintenance costs are dependent on the vehicle/engine type as well as utilization and maintenance policies.

The Management Science and Operations Research (MS/OR) literature pioneered the usage of vehicle replacement models (VRM) to optimize decisions regarding vehicle purchases, scrapping, maintenance, and utilization. A formal optimization model, dealing with a similar but the more general topic of equipment replacement models, was first introduced in the 1950's (Bellman, 1955). Another important development was the addition of *parallel replacement models* where management decisions are made for a set of machines or vehicles instead of one machine or vehicle at the time (Jones et al., 1991). Although the machine or vehicle replacement literature is rich in models dealing with budget constraints (Karabakal et al., 1994), variable utilization (Bethuyne, 1998), stochastic demands (Hartman, 2001), and

³ www.kbb.com, Kelly Blue Book new and used car prices, accessed July 15, 2010.

heterogeneous vehicle types (Hartman, 2004) these models have not been used to evaluate environmental impacts or government policies.

Despite the modeling advances in VRMs since the 1950's, scant or null attention has been given in the fleet replacement literature to fleet costs associated with emissions and energy sources. Some researchers used averages or simpler economic models to evaluate the benefits of early EVs or HEVs over conventional vehicles. For example, Deluchi et al. (1989) analyzed EVs technological challenges, life cycle costs, and environmental advantages. Deluchi et al. (1989) conclude their analysis in a cautiously optimistic note indicating that "Thus, by the turn of the century, EVs could be viable second cars in multicar households". Other researchers concluded that the hybrid Toyota Prius was not cost effective in improving fuel economy or lowering emissions against a conventional Toyota Corolla (Lave and MacLean, 2002).

Other line of researcher has focused on the statistical analysis of fleet data and the relationships among age, utilization and costs (Chen and Lin, 2006, Jin and Kite-Powell, 2000, Lin et al., 2008). Another group of researchers has focused on general life cycle optimization of vehicle replacement decisions (Dill, 2004, Spitzley et al., 2005); however, these approaches cannot be directly applied to a specific fleet because they were intended for policy planning purposes. Specifically, these life cycle models are not useful for a fleet manager because they do not provide requisite answers regarding *when* and *what* to purchase/replace/scrap over time as a function of costs and utilization. Although this type of research can provide useful insights regarding the general timing of scrapping decisions or the probability of vehicle breakdown, it cannot be used to forecast or analyze the competitiveness of new technologies or vehicle types.

To the best of the authors' knowledge there is no published research that simultaneously incorporates into fleet management models the impacts of new engine technologies, GHG costs, fiscal policies, and market conditions as done in this paper for 2010 passenger vehicle technologies in the USA.

3. Decision Model

The fleet replacement model described in this section aims to provide answers regarding *when* and *what* to purchase/replace or salvage/scrap over time as a function of cost and utilization. The goal is to present a model that is parsimonious yet can evaluate the impacts of new engine technologies, GHG costs, fiscal policies, and market conditions. The VRM utilized in this paper is an extension of the work of Hartman (2004) but also incorporates multiple vehicle types and GHG emissions costs associated to (a) vehicle utilization and (b) production costs.

For the sake of readability and easy interpretation of the model, decision variables or the cardinality of a set are denoted as capital letters; sets are denoted by bold capital letters; and parameters are denoted using small letters, broken down in four categories (constraints, cost or revenue, emissions, and initial conditions).

Model Formulation

Indexes

Age of a vehicle type k in years: $i \in \mathbf{A}_k = \{0, 1, 2, \dots, A_k\}$,

Time periods, decisions are taken at the end of each year: $j \in \mathbf{T} = \{0, 1, 2, \dots, T\}$, and

Type of vehicle/engine: $k \in \mathbf{K} = \{1, 2, \dots, K\}$.

Decision Variables

X_{ijk} = the number of i -year old, k -type vehicles in use from the end of year j to the end of year $j + 1$,

Y_{ijk} = the number of i -year old, k -type vehicle salvaged at the end of year j , and

P_{jk} = the number of k -type vehicles purchased at the end of year j .

Parameters

(a) Constraints

$a_k = A_k$ = maximum age of vehicle type k (it must be salvaged when a vehicle reaches this age),

u_{ijk} = utilization (miles traveled by an i -year old, k -type vehicle from the end of year j to the end of year $j + 1$),

d_j = demand (miles traveled by all types of vehicle) from the end of year j to the end of year $j + 1$,

b_j = budget (available for purchasing new vehicles) constraint from the end of year j ,

(b) *Cost or revenue*

v_{jk} = cost of a k -type vehicle purchased at the end of year j ,

om_{ik} = operation and maintenance cost per mile for an i -year old, k -type vehicle,

s_{ik} = salvage revenue (negative cost) from selling an i -old, k -type vehicle,

ec = emissions cost per ton of GHG,

dr_j = discount rate, value of money over time.

(c) *Emissions*

ep_k = production emissions, in GHG equivalent tons, associated to a k -type vehicle,

es_k = scrapping emissions, in GHG equivalent tons, associated to a k -type vehicle,

em_{ik} = utilization emissions in GHG equivalent tons per mile for an i -year old, k -type vehicle, and

(d) *Initial conditions*

h_{ik} = the number of i -year old, k -type vehicles available at time zero.

Objective Function, minimize:

$$\begin{aligned} & \sum_{j=0}^{T-1} \sum_{k=1}^K (v_{jk} + ep_k ec) P_{jk} (1 + dr_j)^{-j} + \sum_{i=0}^{N_k-1} \sum_{j=0}^{T-1} \sum_{k=1}^K om_{ik} u_{ijk} X_{ijk} (1 + dr_j)^{-j} \\ & - \sum_{i=1}^{N_k} \sum_{j=0}^T \sum_{k=1}^K (s_{ik} - es_k ec) Y_{ijk} (1 + dr_j)^{-j} + \sum_{i=0}^{N_k-1} \sum_{j=0}^{T-1} \sum_{k=1}^K em_{ik} u_{ijk} ec X_{ijk} (1 + dr_j)^{-j} \end{aligned} \quad (1)$$

Subject to:

$$\sum_{k=1}^K v_{jk} \cdot P_{jk} \geq b_j \quad \forall j \in \{0, 1, 2, \dots, T-1\} \quad (2)$$

$$\sum_{i=0}^{N_k-1} \sum_{k=1}^K X_{ijk} \cdot u_{ijk} \geq d_j \quad \forall j \in \{0, 1, 2, \dots, T-1\} \quad (3)$$

$$P_{jk} = X_{0jk} \quad \forall j \in \{1, 2, \dots, T-1\} \quad \forall k \in \mathbf{K} \quad (4)$$

$$P_{0k} + h_{0k} = X_{00k} \quad \forall k \in \mathbf{K} \quad (5)$$

$$X_{i0k} + Y_{i0k} = h_{ik} \quad \forall i \in \{1, 2, \dots, A_k\}, \forall k \in \mathbf{K} \quad (6)$$

$$X_{(i-1)(j-1)k} = X_{ijk} + Y_{ijk} \quad \forall i \in \{1, 2, \dots, A_k\}, \forall j \in \{1, 2, \dots, T\}, \forall k \in \mathbf{K} \quad (7)$$

$$X_{iT k} = 0 \quad \forall i \in \{0, 1, 2, \dots, A_k - 1\} \quad \forall k \in \mathbf{K} \quad (8)$$

$$X_{A_k j k} = 0 \quad \forall j \in \{0, 1, 2, \dots, T\} \quad \forall k \in \mathbf{K} \quad (9)$$

$$Y_{0jk} = 0 \quad \forall j \in \{0, 1, 2, \dots, T\} \quad \forall k \in \mathbf{K} \quad (10)$$

$$P_{jk}, X_{ijk}, Y_{ijk} \in \mathbf{I} = \{0, 1, 2, \dots\} \quad (11)$$

The objective function, expression (1), minimizes the sum of purchasing, maintenance, operation, salvage, and emissions costs over the period of analysis, i.e. from time zero (present) to the end of year T . Purchase costs cannot exceed the yearly budget, expression (2). The number of vehicles in the fleet at any time must equal or exceed the minimum needed to cover the demand in terms of annual miles traveled, expression (3). The number of vehicles purchased must equal the number of new vehicles for each vehicle type and year, except for the current time, expression (4); the number of new vehicles utilized during year zero must equal the sum of existing new vehicles plus purchased vehicles, expression (5). Similarly, expression (6) ensures the conservation of vehicles, i.e. the initial vehicles (not 0-age ones) must be either used or sold. The age of any vehicle in use will increase by 1 year after each time period (7). At the end of the last time period, there will be no vehicle in use for any age or type of vehicles, i.e. all vehicles will be sold at the corresponding salvage value, which is a function of vehicle type and age (8). When a vehicle reaches its allowable maximum age, a function of vehicle type, the vehicle must be sold at the corresponding salvage value (9). A newly purchased vehicle should not be sold before use (10). Finally, the decision variables associated to purchasing, utilization, and salvaging decisions must be integer positive numbers, expression (11).

4. Scenarios

Four different factors are analyzed: GHG emissions costs, electric vehicle tax credits, annual utilization, and gasoline prices (see Table 1).

Table 1 Extreme values used for VRM scenarios

	Vehicle Utilization (miles)	Gasoline Prices (\$/gallon)	EV Tax Credit (\$)	GHG Costs (\$/ton)
Base Case (scenario 0 or S0)	13,000	2.72	0	0
Extreme Case (scenario 15 or S15)	19,000	4.10	7,500	18.7

The values shown in Table 1 were established based on: (a) the average vehicle utilization in the USA for vehicles that are less than 10 years old (approximately 13,000 miles per year) and the miles driven by the demographic group with higher mileage (males, 35 to 54 years old with an average of approximately 19,000 miles per year)⁴; (b) the average value of gasoline prices in the USA during the second half of 2010 and the highest ever gasoline price recorded in the Summer of 2008 (AAA, 2010); (3) the current USA federal government tax credit for EVs, (d) a median European value for GHG in \$/ton (Carbon, 2010) in the second half of 2010.

The combination of categories and values presented in Table 1 generate the 16 scenarios depicted in Table 2. For example, scenario one (S1) is the baseline case (S0) but with high vehicle utilization (19,000 miles instead of 13,000 miles). Scenario nine (S9) is the baseline case (S0) but the addition of the federal tax credit of \$7,500 for EVs and a gasoline price of \$4.10 per gallon. If GHG costs are applied, i.e scenario S3, then $ec = \$18.7$ and zero dollars otherwise.

⁴ National Household Travel Survey, Summary of Travel Trends Vehicle Availability and Utilization 2001, <http://nhts.ornl.gov/2001/pub/STT.pdf>

Table 2 Scenarios

Scenario 0	BASELINE				
Scenario 1	1 Combination				High Vehicle Utilization
Scenario 2				High Gasoline Prices	
Scenario 3			GHG Costs		
Scenario 4		EV TaxCredit			
Scenario 5	2 Combination			High Gasoline Prices	High Vehicle Utilization
Scenario 6			GHG Costs		High Vehicle Utilization
Scenario 7		EV TaxCredit			High Vehicle Utilization
Scenario 8			GHG Costs	High Gasoline Prices	
Scenario 9		EV TaxCredit		High Gasoline Prices	
Scenario 10		EV TaxCredit	GHG Costs		
Scenario 11	3 Combination		GHG Costs	High Gasoline Prices	High Vehicle Utilization
Scenario 12		EV TaxCredit		High Gasoline Prices	High Vehicle Utilization
Scenario 13		EV TaxCredit	GHG Costs		High Vehicle Utilization
Scenario 14		EV TaxCredit	GHG Costs	High Gasoline Prices	
Scenario 15	Extreme Case	EV TaxCredit	GHG Costs	High Gasoline Prices	High Vehicle Utilization

5. Data Sources

The VRM model presented in the previous section allows for a complete accounting and optimization of purchasing, operations, maintenance, and emissions costs. The model is data intensive because it requires that the analyst prepares matrices with purchase cost, operations and maintenance, salvage values, and emissions costs as a function of vehicle type and age or time period (v_{ik} , om_{ik} , s_{ik} , and em_{ik} respectively). Herein, it is assumed that data sources, vehicle types, and results are applicable to the United States market (see Table 3). In particular, the model is applied the following competitors:

Table 3 Vehicles Analyzed

Model Brand	Engine Type	Purchase price	Efficiency
Ford Fiesta	Conventional	\$13,320	34.5 mpg
Toyota Yaris	Conventional	\$12,605	32.5 mpg
Honda Insight	Hybrid	\$19,800	41.5 mpg
Nissan Leaf	Electric	\$33,720	99 mpge
Average		\$19,861	

Purchase prices in the United States were obtained from Kelly's Blue Book (KBB, 2010). Similarly, depreciation or salvage values as a function of age and utilization by vehicle type were obtained from Kelly's Blue Book. Purchase price includes manufacturer's suggested retail price (MSRP), registration, and delivery assuming that the destination is Portland, Oregon. In the case of electric vehicles there is no market or historical information regarding depreciation or salvage values. It is assumed that EVs have the same depreciation rate that hybrid vehicles have. Fuel efficiency is assumed to be the average of highway and city miles per gallon (mpg) values using US Environmental Protection Agency procedures⁵. In the case of the Nissan leaf a consumption of 0.25 Kilowatt hour per mile is assumed (Axsen et al., 2010).

Maintenance and operating costs were obtained from historical cost fleet data provided by the Oregon Department of Transportation (ODOT) fleet management division. ODOT's fleet of sedans

⁵ www.fueleconomy.gov, accessed July 15, 2010.

includes conventional and hybrid vehicles. ODOT's fleet management division has been collaborating with Oregon Universities and other studies have studied ODOT's replacement policies and cost functions (Kriett et al., 2010). The typical period of ownership at ODOT is less than eight years on average and up to a maximum of 14 years. Hence, the period of analysis is assumed to be 14 years. In order to study the penetration of hybrids and EVs into conventional fleets, the initial fleet of vehicles is assumed to be 28 vehicles and the initial composition of the fleet is assumed to be comprised of Fords and Toyotas (50% for the Fiesta and Yaris, respectively). Purchasing budget constraints are set to \$100,000 per year, which allows the purchase of up to five vehicles per year (utilizing an average purchase price across vehicle types, see Table 3). In terms of fleet size this translates into a maximum of 20% fleet turnover.

In terms of emissions, the level of GHG emissions associated with conventional vehicle utilization is estimated as a function of fuel efficiency, fuel type and its carbon content⁶. For emissions associated with the EV we assume the most favorable scenario, i.e. zero tailpipe emissions and 100% renewable *green* energy sources. In reality, a precise estimate of electric energy sources ("clean" vs. "dirty") can vary greatly as a function of time of day and location of the charging station (Samaras and Meisterling, 2008, Elgowainy et al., 2009). The cost of GHG was estimated using the current European cap and trade value, around 18.7 \$/ton, although this value fluctuates wildly over time (Carbon, 2010). The cost of electricity is assumed to be \$0.12/kWh (an average for the US) although this cost can vary greatly by time of day, location, and energy source. Energy equivalence in terms BTUs for fossil fuels and electricity was estimated using coefficients from the Transportation Energy Data Book (Davis et al., 2010).

Regarding the value of the coefficients ep_k and es_k (manufacturing and scrapping, respectively), research results have consistently indicated that the utilization based emissions ($em_{ik} u_{ijk}$) dominate. For example, for a generic USA family sedan driven 120,000 miles the utilization share is over 84% of the life cycle energy and 87% of the generated CO₂ (Sullivan et al., 1998); similar conclusions were reached and employed by other researchers (Lave and MacLean, 2002). Unfortunately, emissions costs associated to the production/scrapping of vehicles are undoubtedly the most difficult parameter to estimate (DeCicco and Thomas, 1999, Sullivan et al., 1998, Haes et al., 2002). In addition, battery technology is advancing rapidly and it is difficult to forecast future GHG costs associated to manufacturing, mining, and vehicle mass (Scrosati and Garche, 2010). Furthermore, GHG emissions are in direct proportion of vehicle mass (MacLean and Lave, 2003) and EVs can be lighter/smaller due to their simpler mechanics and fewer components. Hence, due to the lack of current EV manufacturing and scrapping GHG data, the high

⁶ <http://www.epa.gov/oms/climate/420f05001.htm>, "Emission Facts: Average Carbon Dioxide Emissions Resulting from Gasoline and Diesel Fuel", US EPA, accessed July 15, 2010.

degree of uncertainty associated to the available estimates and the high vehicle utilization (mileage) this research assumes a value of $ep_k + es_k = 8.5$ GHG tons for conventional vehicles and a value of $ep_k + es_k = 9.5$ GHG tons for HEVs and EVs.

Finally, since purchase and operating costs take place over time, this research assumed a discount rate equal to the average 20-year treasury yield⁷. High discount rates tend to penalize EVs due to their higher upfront purchase costs. We adopted the average 20-year treasury yield for October, 2010, which is equal to 3.5%. This is an unusually low rate in part due to the current recession and US Federal Reserve policies. A zero percent discount rate may be acceptable for GHG emissions analysis since the effects of CO₂ on global warming can be felt for decades or even centuries. However, this approach is not appropriate for a private company and the goal of this research is to analyze the current economic feasibility of different engine technologies.

6. Results and Discussion

For each scenario it is possible to minimize total costs over the planning horizon, expression (1); for each scenario the optimal evolution of the fleet is indicated by the decision variables X_{ijk} (vehicles in use), Y_{ijk} (vehicles salvaged), and P_{jk} (purchases). For example, Figure 1 shows the number of vehicles in use over time for the baseline scenario (scenario 0). In the base case the number Toyota Yaris are purchased steadily toward throughout the simulation due to their higher resale value (the Fiesta has the highest rate of depreciation). It is clear that conventional vehicles dominate purchasing decisions in the near future if we assume an average vehicle utilization rate, low fuel prices, no GHG costs, and no tax incentives for EVs. In this baseline scenario, the fuel efficiency of the fleet tends to decrease over time because the model can save the most money by purchasing the Yaris. In the baseline scenario the EV (Nissan Leaf) is not selected or purchased anytime during the 14-year planning horizon.

⁷ <http://www.treas.gov/offices/domestic-finance/debt-management/interest-rate/yield.shtml>, Daily Treasury Yield Curve Rates, US Treasury, accessed October 28, 2010

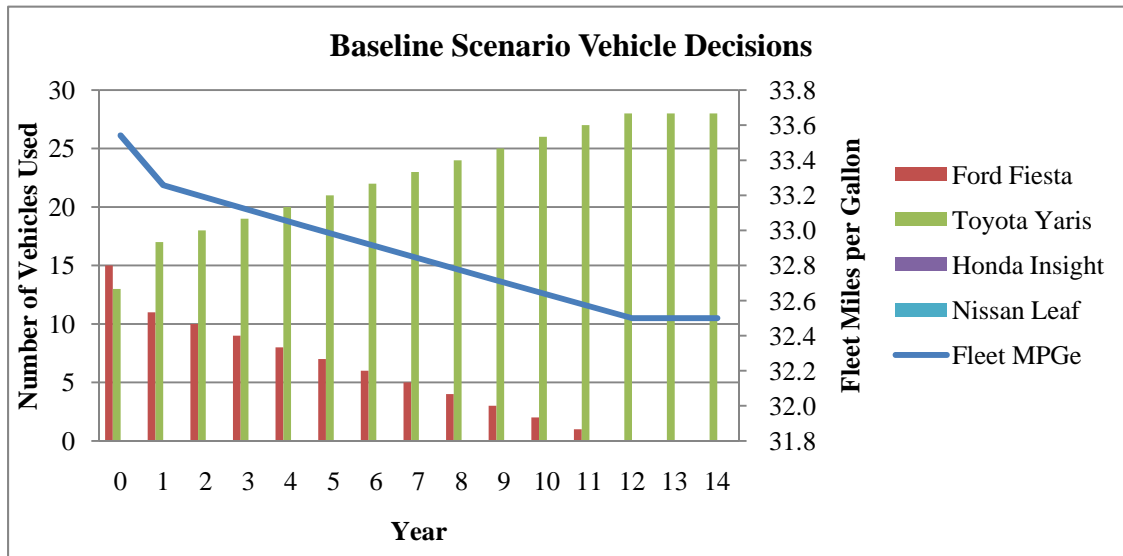


Figure 1. Baseline scenario vehicle decision progression.

Table 4 compares the baseline scenario (S0) to the various single combination scenarios (S1 to S4) and highlights the percentage changes in some key efficiency performance measures. For example, a 2.8% increase in row 1-column 1 indicates that higher vehicle utilization (19,000 miles per year per vehicle instead of 13,000 miles per year per vehicle) results in higher fleet fuel efficiency over the 14 year analysis horizon. This result agrees with statistical analysis of the impact of fuel prices on automotive fleet composition which have shown that higher fuel prices shift new auto purchases towards more fuel-efficient vehicles and accelerates the scrappage of older, less fuel-efficient used vehicles; econometric estimates suggest that a 10 percent increase in gasoline prices from 2005 levels would generate a 0.22 percent increase in fleet fuel economy in the short run and a 2.04 percent increase in the long run (Li et al., 2009).

Table 4. Baseline vs. Individual Factors

	Fleet MPG	Final HEV & EV Fleet (% difference)	Total CO2 / miles	Costs per Mile (\$/mi)	Energy (BTU/mi)
S1/S0	2.8%	0.0%	-6.6%	-13.3%	-2.7%
S2/S0	2.8%	0.0%	-2.3%	19.9%	-2.7%
S3/S0	1.6%	0.0%	-1.3%	3.1%	-1.5%
S4/S0	0.0%	0.0%	0.0%	0.0%	0.0%

It is somewhat ironic that the EV tax credit does not alter the optimal policy on its own (see row S4/S0). On the other hand, high vehicle utilization leads to some of the most efficient outcomes on a per

mile basis. Higher fuel costs or a “carbon tax” would also lead to a more efficient fleet and an overall reduction in energy consumption (in British Thermal Units per mile or BTU/mile) and GHG emission levels (in tons per mile).

Table 5. Baseline vs. Combined Factors (2 Combined)

	Fleet MPG	Final HEV & EV Fleet (% difference)	Total CO2 / miles	Costs per Mile (\$/mi)	Energy (BTU/mi)
S5/S0	3.9%	0.0%	-7.5%	6.4%	-3.7%
S6/S0	2.8%	0.0%	-6.6%	-10.4%	-2.7%
S7/S0	2.8%	0.0%	-6.6%	-13.3%	-2.7%
S8/S0	2.8%	0.0%	-2.3%	23.0%	-2.7%
S9/S0	5.3%	3.57%	-5.0%	19.9%	-5.1%
S10/S0	1.6%	0.0%	-1.3%	3.1%	-1.5%

Table 5 compares the baseline scenario (S0) to the various double combination scenarios (S5 to S10). Unlike Table 4, an EV tax credit combined with high fuel prices leads to a highly efficient outcome in terms of fleet efficiency, GHG emissions, and energy consumption (see S9/S0 row). The combination of high gas prices and utilization also leads to efficient fleets (see S5/S0 row). Table 6 compares the baseline scenario (S0) to the various triple combination scenarios (S11 to S14). In this case, the combination of high fuel prices, high utilization, and tax credit combined (row S12/S0) leads to the most efficient outcome in terms of fleet efficiency and emissions/energy consumption per mile; the electric vehicle is the most cost efficient in Scenario 12. As expected, the most efficient fleet and the lowest level of energy consumption and emissions per mile is obtained when all four factors are combined (row S15/S0).

Table 6. Baseline vs. Combined Factors (3 and 4 Combined)

	Fleet MPG	Final HEV & EV Fleet (% difference)	Total CO2 / miles	Costs per Mile (\$/mi)	Energy (BTU/mi)
S11/S0	4.0%	0.0%	-7.6%	9.3%	-3.8%
S12/S0	71.8%	64.3%	-47.3%	2.4%	-38.6%
S13/S0	2.8%	0.0%	-6.6%	-10.4%	-2.7%
S14/S0	10.5%	10.7%	-10.0%	22.9%	-9.5%
S15/S0	72.8%	64.3%	-47.6%	4.2%	-38.9%

DISCUSSION

The results presented in the previous three tables highlight the variability in terms of outcomes. The recent volatility of fossil fuel prices produces uncertainty in the market. This uncertainty is compounded by the concerns regarding GHG levels, climate, and further government regulation to push for more competitive fuel efficiency standards. Higher fuel efficiency standards will have a significant impact on overall transportation emissions and energy levels (Cheah et al., 2010). On the other hand, the high levels of US government public debt lead to uncertainties regarding the feasibility of long-term tax incentives for EVs.

It is clear that the current European market cap and trade price of GHG emissions alone is not significant for fleet management decisions in the current market. On the other hand, technological changes are likely to have a significant impact on the competitiveness of EVs (Shiau et al., 2009). For example, battery costs are expected to drop from \$400 per kilowatt/hour (\$400/kwh) to \$200/kwh in four years; this would drop the price of the Nissan Leaf by \$4,800. There is also great uncertainty in terms of EVs depreciation, maintenance, and operation costs. Commodity prices can offset technological advances if metals and rare earth mineral prices increase significantly in the future. Car manufacturers seem optimistic since they are offering battery guarantees for eight years or 100,000 miles⁸.

Some factors that can affect the economic feasibility of EVs were not included in this research. For example, the issue of “range anxiety”; it was assumed that EVs have the same utilization as conventional and hybrid vehicles. Government subsidies and regulation will be necessary to provide fast charging stations. In Oregon, the state and federal government are subsidizing the construction of Level 3 charging stations that can provide an 80% recharge in 20 to 30 minutes and a network of 1,100 Level 2 charging stations across the state⁹. Other countries, like Israel, are experimenting with stations to swap batteries in a few minutes¹⁰. This study assumed that there are no costs associated to the charging infrastructure needed for EVs. However, a report prepared for the US Department of Energy indicates that the costs associated with providing charging infrastructure for EV or PHEV vehicles will be one of the key factors determining the success of this new “clean” technology¹¹. Costs associated to home recharging stations

⁸ <http://www.economist.com>, “A sparky new motor”, The Economist, October 9th, 2010, online and printed edition

⁹ http://www.oregonlive.com/business/index.ssf/2010/10/more_charging_stations_on_the.html, “More charging stations on the way for electric vehicles in Oregon” The Oregonian, accessed October 16, 2010

¹⁰ <http://www.abc.net.au/news/stories/2010/10/26/3047994.htm?section=justin>, “Electric car fleet to hit the road in Israel”, ABC news, accessed October 16, 2010

¹¹ <http://avt.inel.gov/pdf/phev/phevInfrastructureReport08.pdf>

are approximately \$2,000 or more if the house has an outdated electrical installation; at the moment, the federal government and some cities are providing subsidies¹².

7. Conclusions

The VRM presented in this paper integrates traditional fleet management costs with environmental elements such as GHG equivalent Life Cycle Costs in terms of vehicle production and utilization. Employing real-world fleet and cost data, it was shown that VRMs can illuminate policy decisions and guide the usage of public and private resources to reduce monetary and environmental costs. Sophisticated decision tools and models are needed to manage the complex tradeoffs surrounding fleet management decisions.

For EVs to be competitive, it is clear that tax incentives are needed in an economic context with relative moderate fuel prices, higher initial purchase costs for EVs, and no carbon taxes. With current prices, it seems that EVs are only justified when there are both high gas prices and high utilization. Gasoline prices have a great influence on vehicle replacement decisions and any increases will undoubtedly encourage the rate of high MPG vehicle purchases. With increased utilization, the same trend will be observed however GHG emission levels will not be significantly reduced. The current price of carbon from European cap and trade markets does not affect replacement decisions as much as gasoline price does. The results and discussion clearly indicate that more research is needed to follow the evolution of market prices and technologies. Fluctuations in terms of batteries, fuel prices or carbon taxes, and tax incentives or government subsidies can lead to dramatic changes in competitiveness.

¹² <http://www.nytimes.com/pages/automobiles/autospecial2/index.html>, "Bringing Home Baby, Your Electric Car", New York Times, accessed October 16, 2010

ACKNOWLEDGEMENTS

The authors would like to acknowledge the support of Oregon Transportation Research and Education Consortium (OTREC) for supporting this research and the Oregon Department of Transportation for providing fleet cost data. Any omissions or mistakes are the sole responsibility of the authors.

REFERENCES

- AAA (2010) AAA's Daily Fuel Gauge Report. American Automotive Association. Accessed July 15. 2010 www.fuelgaugereport.com.
- AXSEN, J., KURANI, K. S. & BURKE, A. (2010) Are batteries ready for plug-in hybrid buyers? *Transport Policy*, 17(3), 173-182.
- BELLMAN, R. (1955) Equipment replacement policy. *Journal of the Society for Industrial and Applied Mathematics*, 3(3), 133-136.
- BETHUYNE, G. (1998) Optimal replacement under variable intensity of utilization and technological progress. *The Engineering Economist*, 43(2), 85-105.
- CARBON, P. (2010) Point Carbon, CO2 emissions market information site. accessed June 27. 2010 www.pointcarbon.com.
- CHEAH, L., HEYWOOD, J. & KIRCHAIN, R. (2010) The energy impact of US passenger vehicle fuel economy standards. *2010 IEEE International Symposium on Sustainable Systems and Technology (ISSST)*, 17-19 May 2010, Arlington, VA. IEEE.
- CHEN, C. & LIN, J. (2006) Making an informed vehicle scrappage decision. *Transport Reviews*, 26(6), 731-748.
- DAVIS, S. C., DIEGEL, S. W. & BOUNDY, R. G. (2010) Transportation Energy Data Book: Edition 29. Oak Ridge National Laboratory (ORNL).
- DECICCO, J. M. & THOMAS, M. (1999) A method for green rating of automobiles. *Journal of Industrial Ecology*, 3(1), 55-75.
- DELUCHI, M., WANG, Q. & SPERLING, D. (1989) Electric vehicles: performance, life-cycle costs, emissions, and recharging requirements. *Transportation Research Part A: General*, 23(3), 255-278.
- DILL, J. (2004) Estimating emissions reductions from accelerated vehicle retirement programs. *Transportation Research part D*, 9(87-106).
- ELGOWAINY, A., BURNHAM, A., WANG, M., MOLBURG, J. & ROUSSEAU, A. (2009) Well-To-Wheels Energy Use and Greenhouse Gas Emissions of Plug-in Hybrid Electric Vehicles. *SAE International Journal of Fuels and Lubricants*, 2(1), 627.
- HAES, H. A., FINNVEDEN, G., GOEDKOOP, M., HAUSCHILD, M., HERTWICH, E., HOFSTETTER, P., JOLLIET, O., KLÖPFER, W., KREWITT, W. & LINDEIJER, E. (2002) *Life cycle impact assessment: Striving towards best practice*, Pensacola: SETAC PRESS.
- HARTMAN, J. C. (2001) An economic replacement model with probabilistic asset utilization. *IIE Transactions*, 33(9), 717-727.
- HARTMAN, J. C. (2004) Multiple asset replacement analysis under variable utilization and stochastic demand. *European Journal of Operational Research*, 159(1), 145-165.
- JIN, D. & KITE-POWELL, H. L. (2000) Optimal fleet utilization and replacement. *Transportation Research Part E: Logistics and Transportation Review*, 36(1), 3-20.
- JONES, P. C., ZYDIK, J. L. & HOPP, W. J. (1991) Parallel machine replacement. *Naval Research Logistics*, 38(3), 351-365.
- KARABAKAL, N., LOHMANN, J. R. & BEAN, J. C. (1994) Parallel replacement under capital rationing constraints. *Management Science*, 305-319.
- KBB (2010) Kelly Blue Book Online, accessed November 27. 2010, www.kbb.com.
- KRIETT, P. O., MBUGUA, W. N., KIM, D. S. & PORTER, J. D. (2010) Equipment Replacement at Departments of Transportation. *Transportation Research Record*, No 2150(10-17).
- LAVE, L. B. & MACLEAN, H. L. (2002) An environmental-economic evaluation of hybrid electric vehicles: Toyota's Prius vs. its conventional internal combustion engine Corolla. *Transportation Research Part D: Transport and Environment*, 7(2), 155-162.

- LI, S., TIMMINS, C. & HAEFEN, R. H. (2009) How do gasoline prices affect fleet fuel economy? *American Economic Journal: Economic Policy*, 1(2), 113-137.
- LIN, J., CHEN, C. & NIEMEIER, D. A. (2008) An analysis on long term emission benefits of a government vehicle fleet replacement plan in northern illinois. *Transportation*, 35(2), 219-235.
- MACLEAN, H. L. & LAVE, L. B. (2003) Evaluating automobile fuel/propulsion system technologies. *Progress in energy and combustion science*, 29(1), 1-69.
- SAMARAS, C. & MEISTERLING, K. (2008) Life cycle assessment of greenhouse gas emissions from plug-in hybrid vehicles: implications for policy. *Environ. Sci. Technol*, 42(9), 3170-3176.
- SCROSATI, B. & GARCHE, J. (2010) Lithium batteries: Status, prospects and future. *Journal of Power Sources*, 195(9), 2419-2430.
- SHIAU, C. S. N., SAMARAS, C., HAUFFE, R. & MICHALEK, J. J. (2009) Impact of battery weight and charging patterns on the economic and environmental benefits of plug-in hybrid vehicles. *Energy Policy*, 37(7), 2653-2663.
- SPITZLEY, D. V., GRANDE, D. E., KEOLEIAN, G. A. & KIM, H. C. (2005) Life cycle optimization of ownership costs and emissions reduction in US vehicle retirement decisions. *Transportation Research Part D*, 10(2), 161-175.
- SULLIVAN, J. L., WILLIAMS, R. L., YESTER, S., COBAS-FLORES, E., CHUBBS, S. T., HENTGES, S. G., POMPER, S. D. & SOCIETY OF AUTOMOTIVE, E. (1998) Life Cycle Inventory of a Generic US Family Sedan: Overview of Results USCAR AMP Project. SOC AUTOMATIVE ENGINEERS INC.
- VYAS, A. D., SANTINI, D. J. & JOHNSON, L. R. (2009) Plug-In Hybrid Electric Vehicles' Potential for Petroleum Use Reduction: Issues Involved in Developing Reliable Estimates. *88th Annual Meeting of the Transportation Research Board Washington, D.C. January 11–15, 2009*.