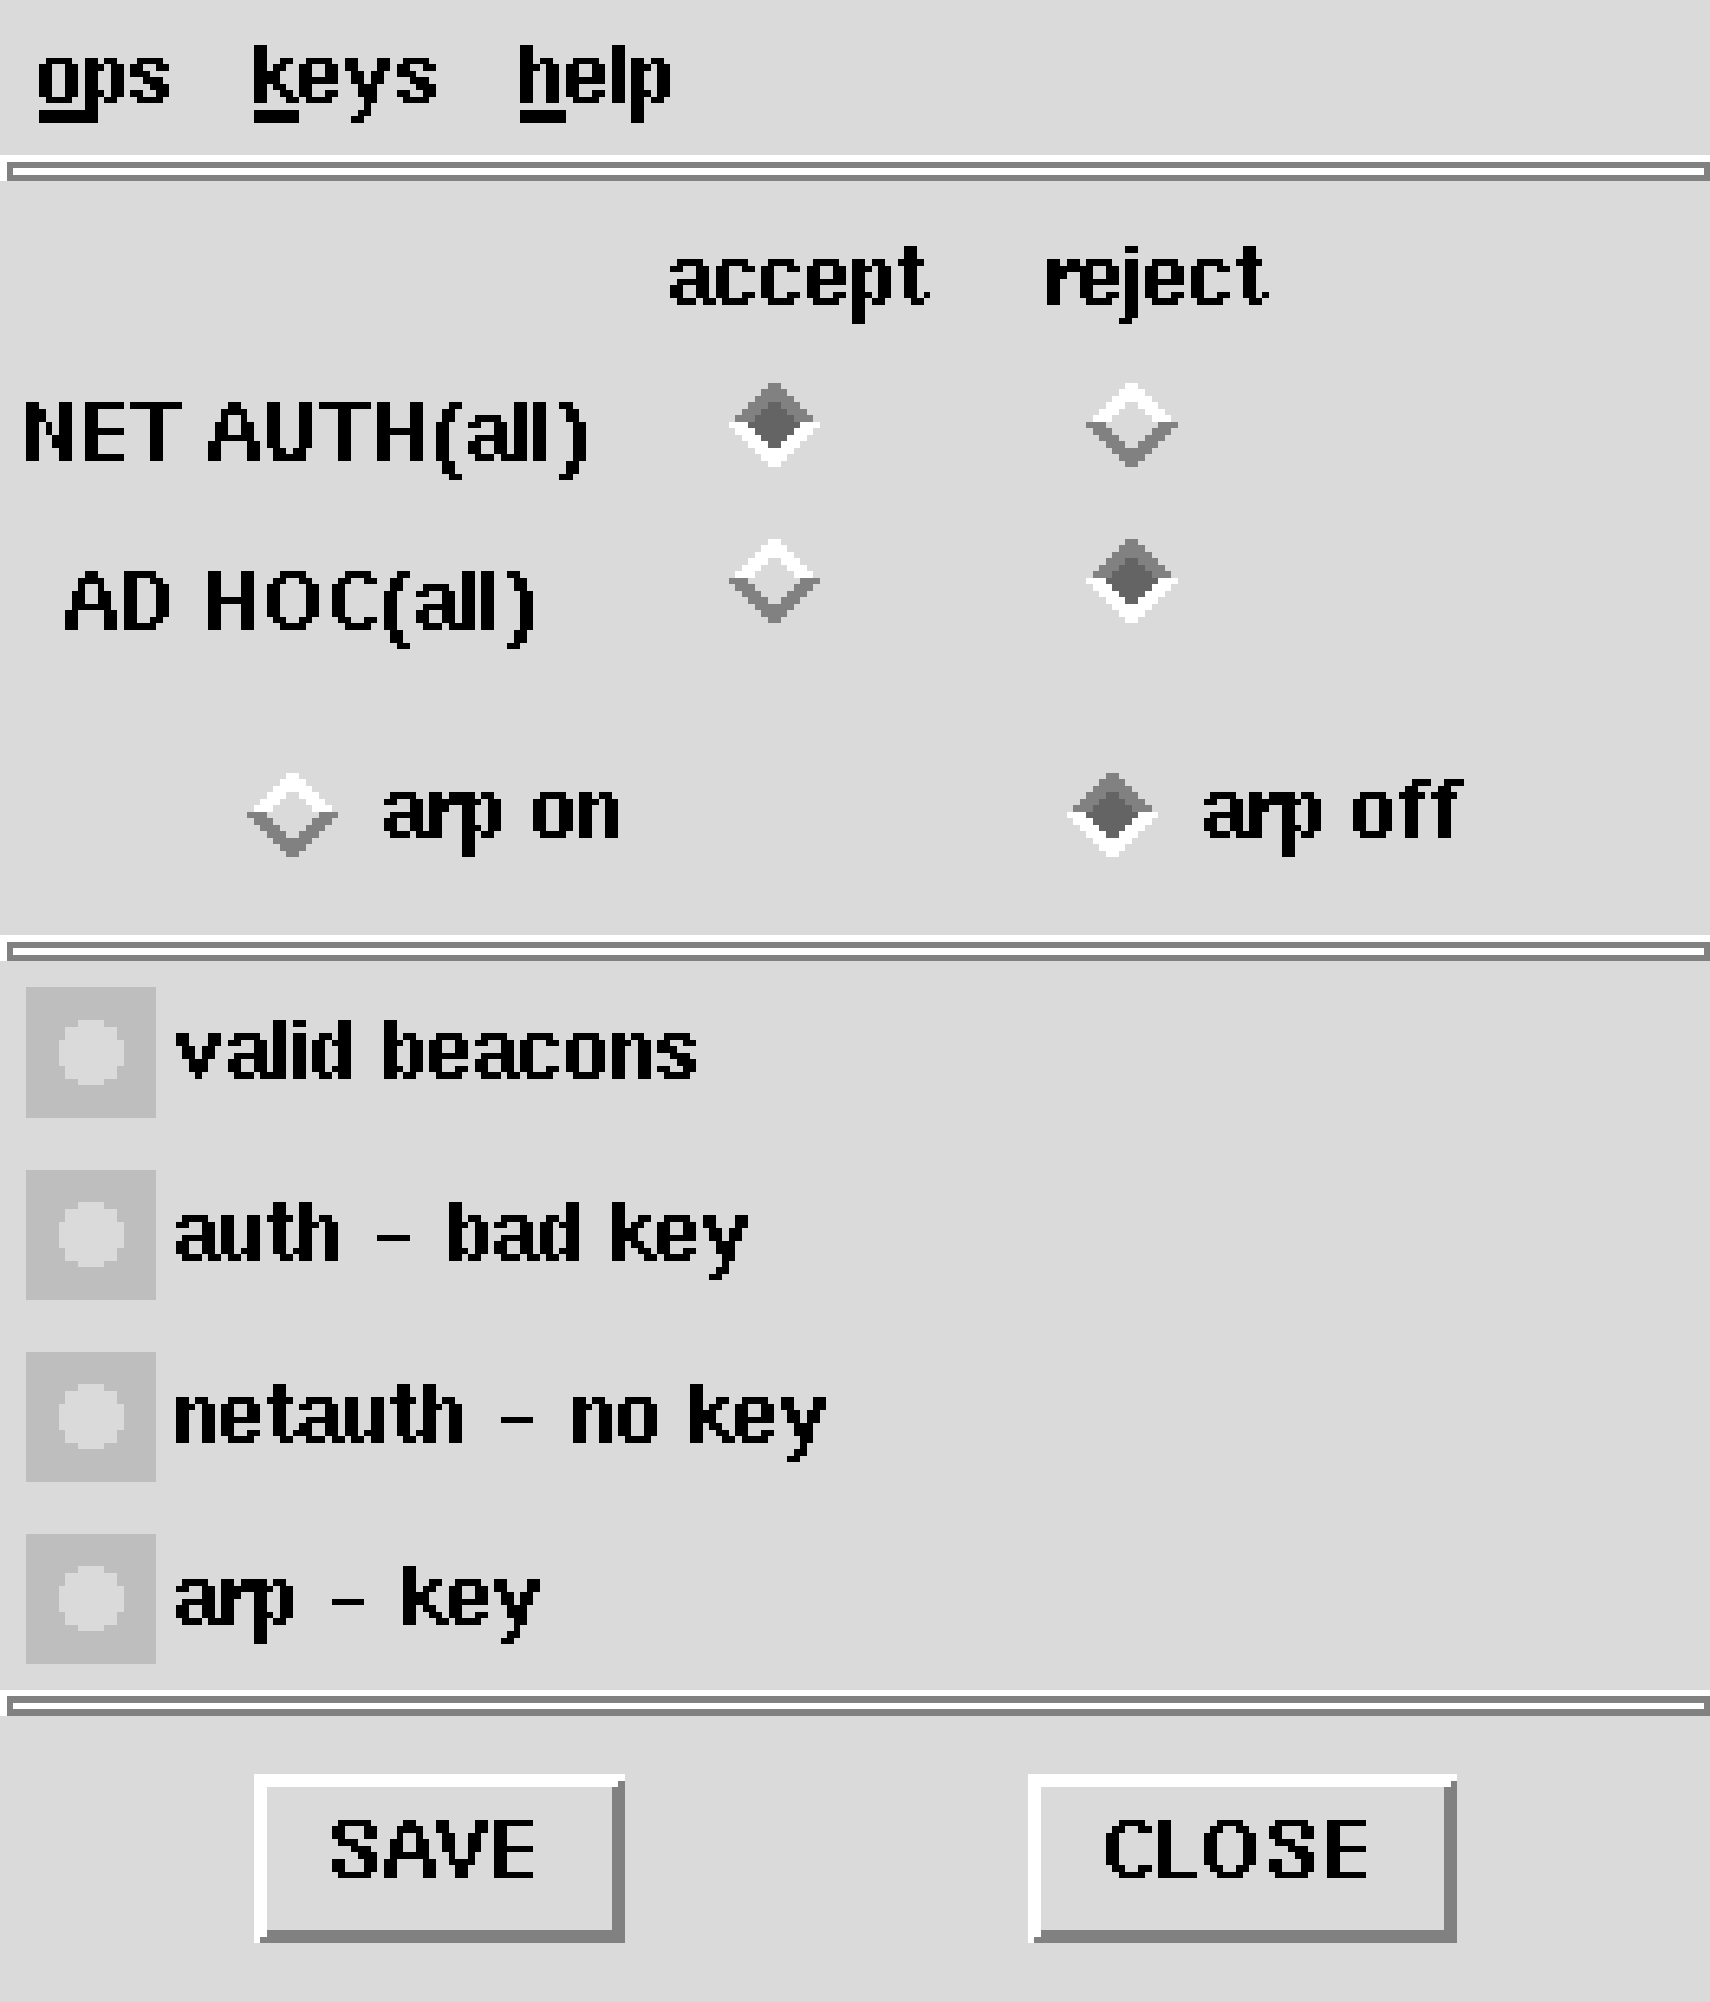
ops keys help
accept reject
NET AUTH(all)
AD HOC(all)
arp on
arp off
valid beacons
auth - bad key
netauth - no key
arp - key
SAVE
CLOSE