


NFA's with Λ -Transitions

- We extend the class of NFAs by allowing instantaneous transitions:
 1. The automaton may be allowed to change its state without reading the input symbol.
 2. In diagrams, such transitions are depicted by labeling the appropriate arcs with Λ .
 3. Note that this does not mean that Λ has become an input symbol. On the contrary, we assume that *the symbol Λ does not belong to any alphabet.*

example

- $\{ a^n \mid n \text{ is even or divisible by } 3 \}$

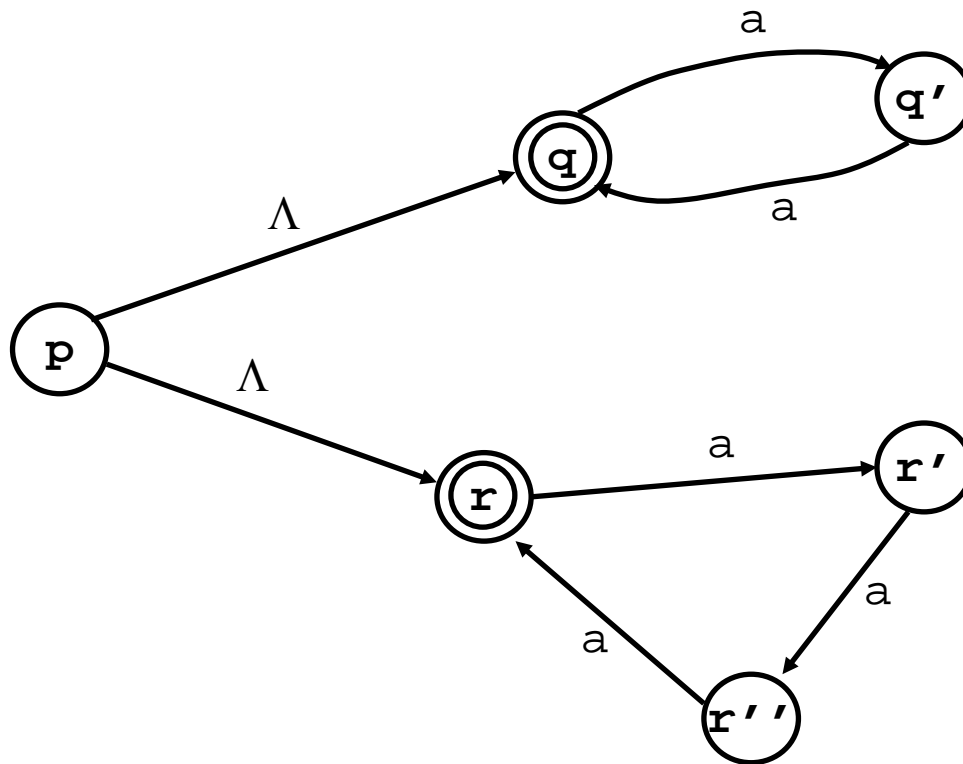

Definition


- A Λ -NFA is a quintuple $\mathbf{A} = (\mathbf{Q}, \Sigma, \mathbf{s}, \mathbf{F}, \delta)$, where
 - \mathbf{Q} is a set of *states*
 - Σ is the alphabet of *input symbols*
 - \mathbf{s} is an element of \mathbf{Q} --- the *initial state*
 - \mathbf{F} is a subset of \mathbf{Q} --- the set of *final states*
 - $\delta: \mathbf{Q} \times (\Sigma \cup \Lambda) \longrightarrow \mathbf{Q}$ is the *transition function*
- Note Λ is never a member of Σ

Λ -NFA

- Λ -NFAs add a convenient feature but (in a sense) they bring us nothing new: they do not extend the class of languages that can be represented. Both NFAs and Λ -NFAs recognize exactly the same languages.
- Λ -transitions are a convenient feature: try to design an NFA for the even or divisible by 3 language that does not use them!
 - Hint, you need to use something like the product construction from union-closure of DFAs

Λ -Closure

- Λ -closure of a state
- The Λ -closure of the state q , denoted $ECLOSE(q)$, is the set that contains q , together with all states that can be reached starting at q by following only Λ -transitions.

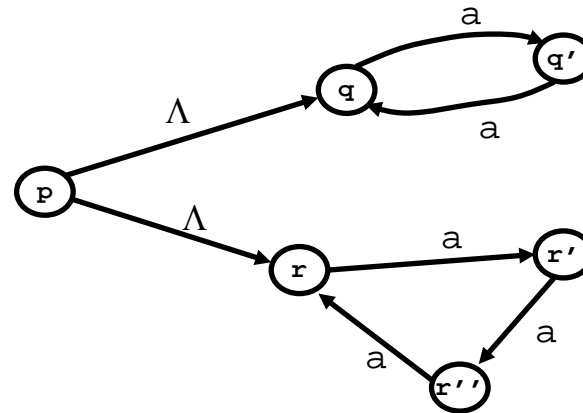


- In the above example:
- $ECLOSE(p) = \{p, q, r\}$
- $ECLOSE(x) = \{x\}$ for any of the remaining five states, x .

Elimination of Λ -Transitions


- Given an Λ -NFA N , this construction produces an NFA N' such that $L(N')=L(N)$.
- The construction of N' begins with N as input, and takes 3 steps:
 1. Make p an accepting state of N' iff $ECLOSE(p)$ contains an accepting state of N .
 2. Add an arc from p to q labeled a iff there is an arc labeled a in N from some state in $ECLOSE(p)$ to q .
 3. Delete all arcs labeled Λ .

Illustration


- We illustrate the procedure on the following Λ -NFA N , accepting the strings over $\{a,b,c\}$ of the form $a^i b^j c^k$ ($i,j,k \geq 0$)

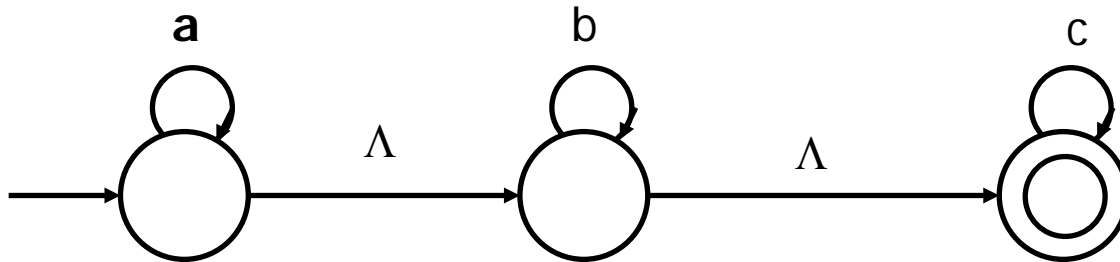


1) Make p an accepting state iff $ECLOSE(p)$ contains an accepting state of N

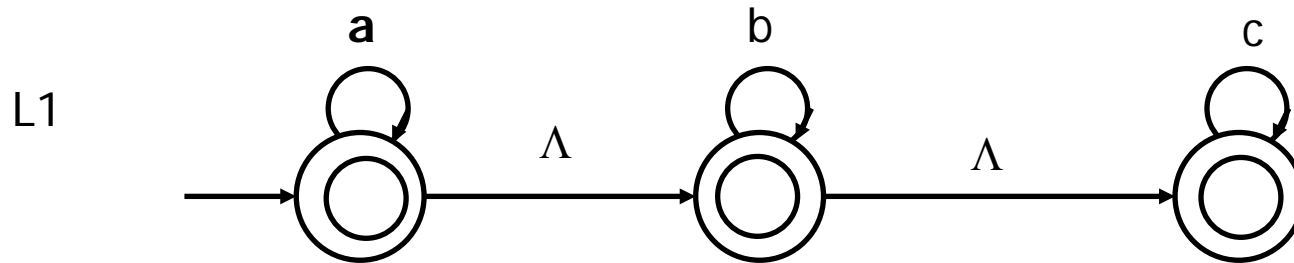

2) Add an arc from p to q labeled a iff there is an arc labeled a from some state in $ECLOSE(p)$ to q

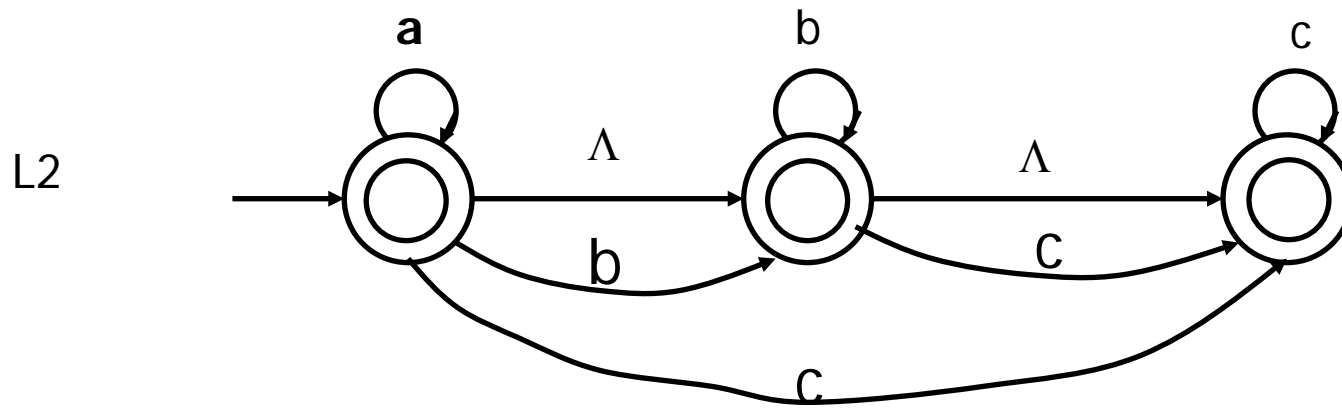

3) Delete all arcs labeled Λ

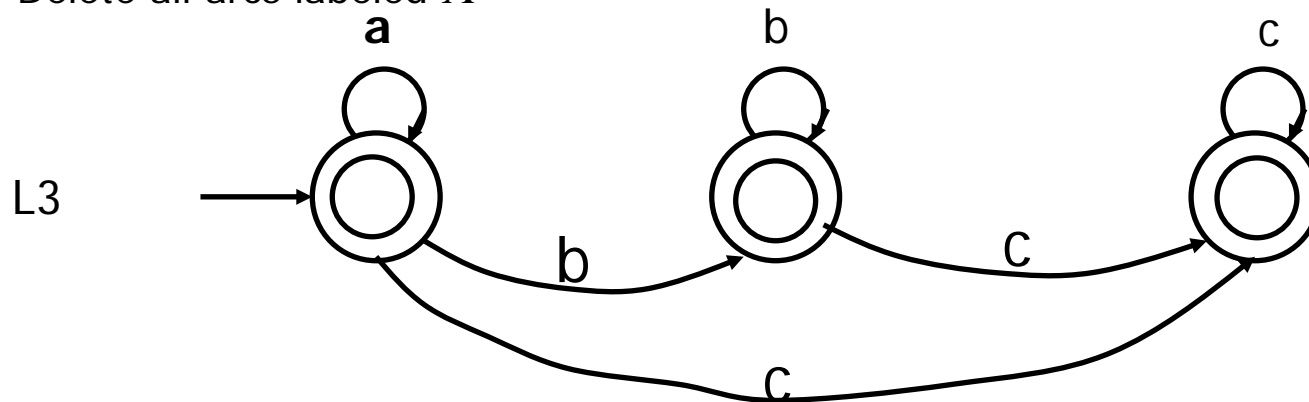

Why does it work?

- The language accepted by the automaton is being preserved during the three steps of the construction: $L(N) = L(N_1) = L(N_2) = L(N_3)$
- Each step here requires a proof. A Good exercise for you to do!